

Dati tecnici / Technical data / Datos técnicos / Données techniques

TIPO / TYPE / MODELO / MODÈLE		P1 (kW)	AMPERE		Q (m ³ /h - l/min)						
1~	3~		1~	3~	0	3	6	9	12	15	18
230 V - 50 Hz	230 / 400 V - 50 Hz		1x230V 50Hz	3x400V 50Hz	0	50	100	150	200	250	300
				H (m)							
DC 80 G	-	1050	4.7	-	8.3	7.4	6.4	5.6	4.8	3.7	-
DC 80	DC 80 T	1050	4.7	2.2	8.3	7.4	6.4	5.6	4.8	3.7	-
DC 80/2 G	-	1050	4.7	-	8.3	7.4	6.4	5.6	4.8	3.7	-
DC 80/2	DC 80/2 T	1050	4.7	2.2	8.3	7.4	6.4	5.6	4.8	3.7	-
DC 100 G	-	1350	6.2	-	10.4	9.4	8.7	8.1	7.4	6.6	5.7
DC 100	DC 100 T	1350	6.2	2.8	10.4	9.4	8.7	8.1	7.4	6.6	5.7
DC 100/2 G	-	1350	6.2	-	10.4	9.4	8.7	8.1	7.4	6.6	5.7
DC 100/2	DC 100/2 T	1350	6.2	2.8	10.4	9.4	8.7	8.1	7.4	6.6	5.7



Dimensioni / Dimensions / Dimensiones / Dimensions



Passaggio corpi solidi:
Passage corps solides:
Passage of solids:
Paso de solidos:

max. Ø 35 mm

Profondità immersione:
Depth of immersion:
Profundidad inmersión:
Profondeur immersion:

max. 5m

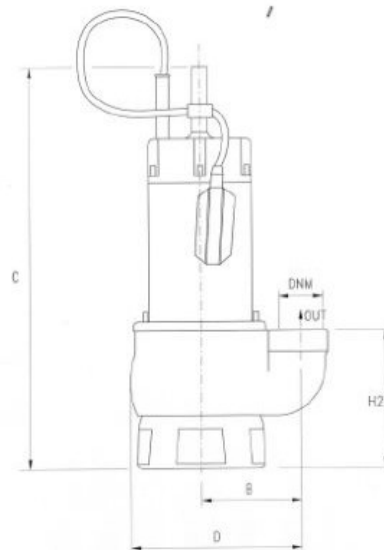

TIPO / TYPE / MODELO / MODÈLE	DIMENSIONI / DIMENSIONS / DIMENSIONES / DIMENSIONS (mm)								
	B	C	D	H2	DNM	I	L	M	
DC 80 G	110	410	230	160	1" 1/2	170	235	450	12
DC 80/2 G	110	410	230	160	2"	170	235	450	12
DC 100 G	110	410	230	160	1" 1/2	170	235	450	13.5
DC 100/2 G	110	410	230	160	2"	170	235	450	13.5

