

Dati tecnici / Technical data / Datos técnicos / Données techniques

TIPO / TYPE / MODELO / MODÈLE		Pot. assorbita Puiss. absorbée Input power Leistungsaufnahme Pot. absorbida	AMPERE		Q (m ³ /h - l/min)					
1~	3~		1~	3~	0	3	6	9	12	15
230 V - 50 Hz	230 / 400 V - 50 Hz		W	1x230V 50Hz	3x400V 50Hz	H (m)				
SP 80 G	SP 80 T	800	3.7	1.8	10.3	9.1	7.8	6.3	4	-
SP 100 G	SP 100 T	1050	5.1	2.3	13.3	12.2	10.9	9.3	7.3	4.5
SPV 80 G	SPV 80 T	550	2.6	1.2	5.4	4.2	2.9	1.7	-	-
SPV 100 G	SPV 100 T	750	3.8	1.7	7.4	5.8	4.7	2.7	-	-


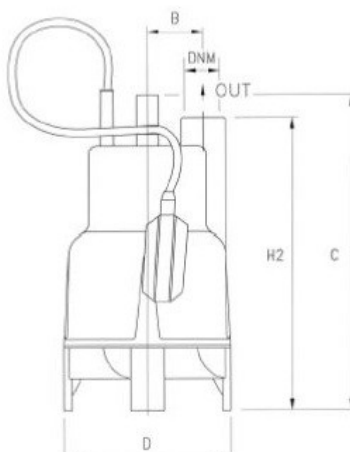
Passaggio corpi solidi:
Passage corps solides:
Passage of solids:
Paso de solidos:



SP max. Ø 4 mm
SPV max. Ø 15 mm

Dimensioni / Dimensions / Dimensiones / Dimensions

Profondità immersione:
Depth of immersion:
Profundidad inmersión:
Profondeur immersion:

max. 5m.



TIPO / TYPE MODELO / MODÈLE	DIMENSIONI / DIMENSIONS / DIMENSIONES / DIMENSIONS (mm)					 I L M			 Kg
	B	C	D	H2	DNM	I	L	M	
SP 80 G	55.5	296	176	276	1" 1/4	185	230	310	8.5
SPV 80 G	55.5	331	176	310	1" 1/4	185	230	345	8.5
SP 100 G	55.5	296	176	276	1" 1/4	185	230	310	10
SPV 100 G	55.5	331	176	310	1" 1/4	185	230	345	10

